

## IBOX-501 N13L2



### Feature

Fanless All Alminum Design

Onboard Intel Skylake i3 7100U, i5 7200U


Support MAX DDR4 2133/2400 16G

Support 1\*M.2, 1\* 2.5 inches SATA

Support WIFI/3G/4G(choose 1 from 3)

Support 4\*USB3.0, 2\*USB2.0


Applied OS:



### Specification

|                |                                                                             |
|----------------|-----------------------------------------------------------------------------|
| Model          | IBOX-501 N13L2                                                              |
| Color          | Black (Any color can be Optional)                                           |
| Material       | Pure Aluminum                                                               |
| Processor      | Support Intel Core i3 7100U (dual core, 2.4GHZ, TDP:15W)                    |
|                | Support Intel Core i5 7200U (dual core, 2.5GHZ, Turbo boost 3.1G, TDP: 15W) |
| Ram            | Support 1*SODIMM DDR4 2133MHZ, MAX: 16GB                                    |
| BIOS           | AMI BIOS                                                                    |
| Display Chip   | Integrated Intel HD Graphics 520                                            |
| Display Port   | 1*DP, 1*HDMI (Support synchronous or asynchronous dual display)             |
| Front I/O      | 4*USB3.0,1*Power Switch, 2*COM                                              |
| Rear I/O       | 2*RJ45 1000M Lan, 2*USB2.0, 1*HDMI, 1*DP, 1*two-in-one Audio, 1*DC 12V Port |
| Expansion Slot | Support 1*MINI PCIE Channel (WIFI/3G/4G Optional)                           |
| Lan            | 2*RTL8111E 10/100/1000M                                                     |
| Storage        | 1*M.2 (PCIE 4X signal), 1*SATA3.0                                           |
| Power Supply   | DC 12V Input                                                                |
| Work Temp      | -10℃ ~ +50℃                                                                 |
| Work Humidity  | 0% ~ 95% No Condensing                                                      |
| Dimension      | 155 * 126.5 * 52.5mm                                                        |
| Weight         | 1.6 kg                                                                      |

## IBOX-501 N13L2 Drawing

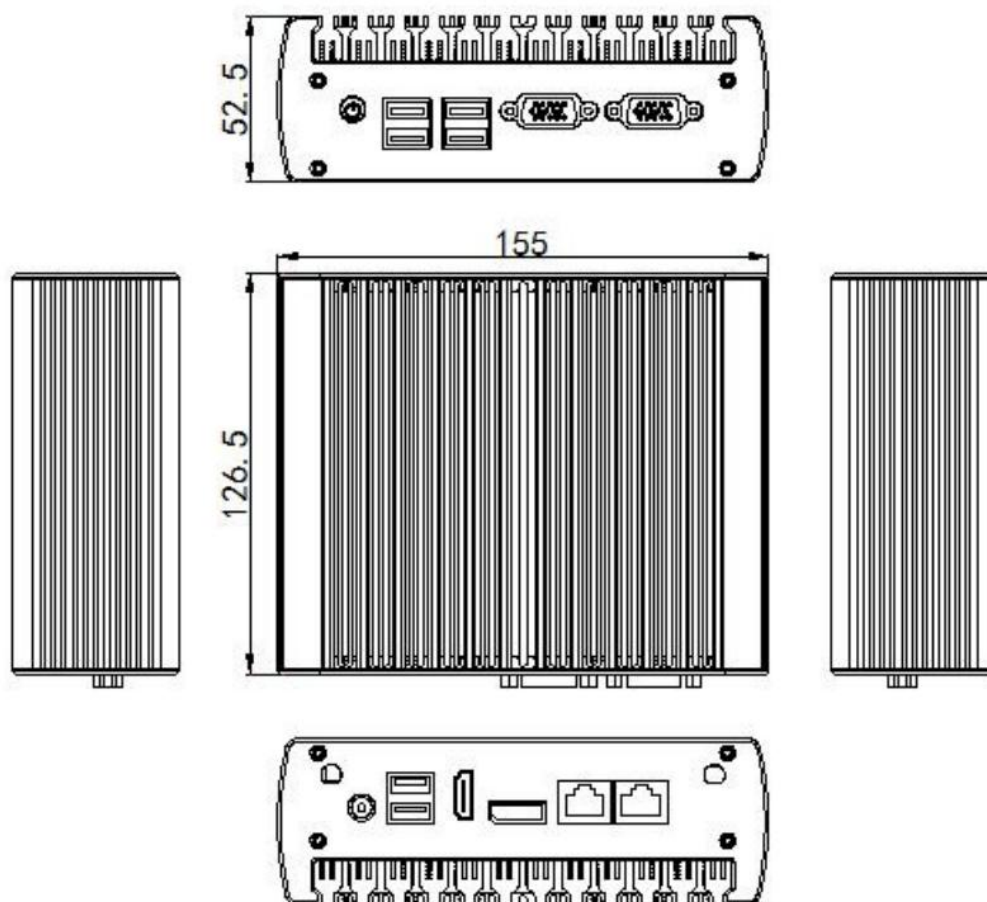

### Applied Area:

Automation, Medical , transportation, Warehouse , electric education etc

#### Accessory

| Name          | Quantity | Specification                                             |
|---------------|----------|-----------------------------------------------------------|
| Power Adapter | 1        | 12V/5A                                                    |
| Power Cord    | 1        | Any Plug is optional (Chinese, British, USA standard etc) |
| CD Driver     | 1        | Neutral                                                   |

#### Order Information

|                 |                |                     |               |
|-----------------|----------------|---------------------|---------------|
| Configuration 1 | IBOX-501 N13L2 | Intel Core i3 7100U | Standard Port |
| Configuration 2 |                | Intel Core i5 7200U | Standard Port |