

TPC-PR150N1

15.0" XGA Intel Cedar trail Resistive Panel PC

Version: 3.0



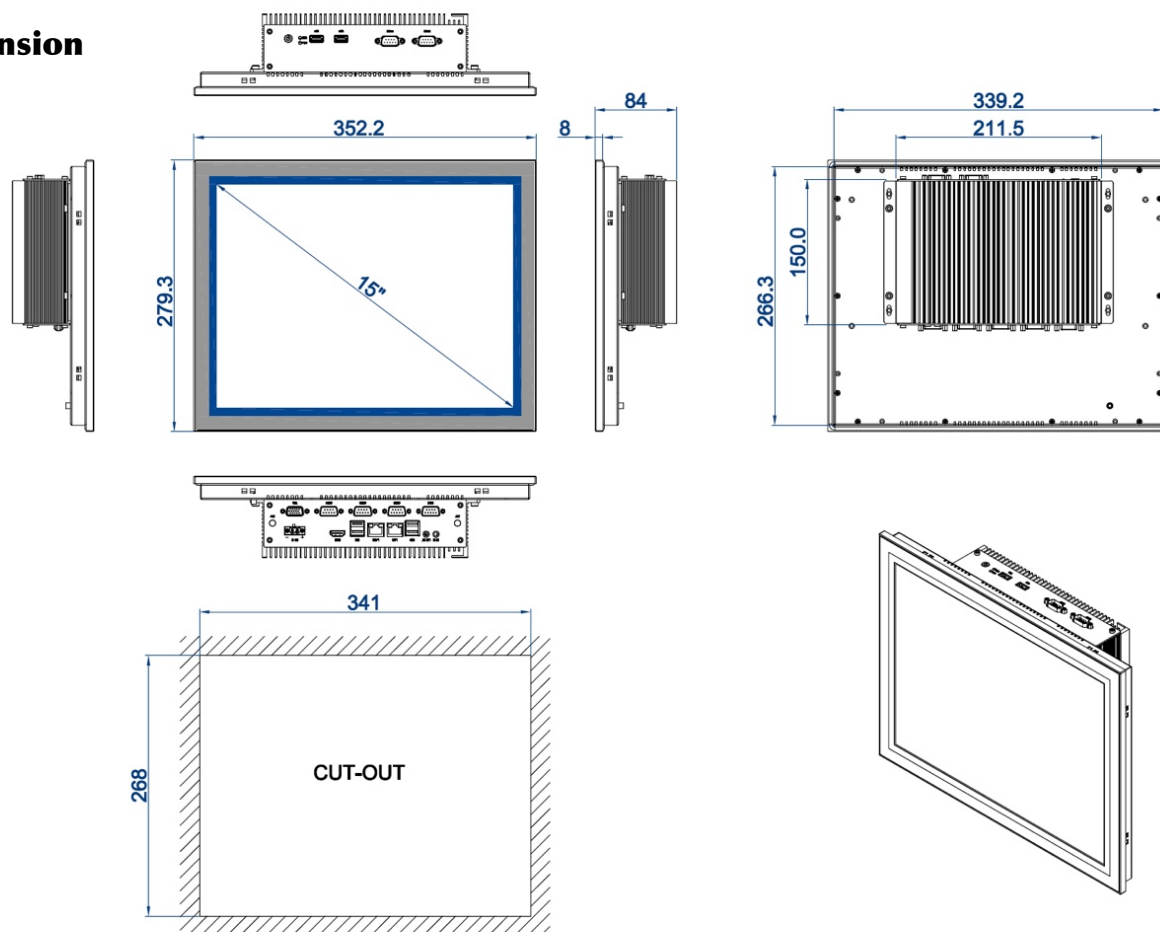
Features

- 15.0" TFT LCD display, LED Backlit, XGA 1024 * 768;
- Intel Cedar trail N2600, Dual-core 1.6Ghz processor;
- High temp. precision 5-wires Resistive touchscreen, EETI controller;
- Aluminum-magnesium alloy, anodized treatment, Modular designed;
- DC 12V, with over-current, over-voltage and polarity protection;
- 2*GLAN, 5*USB, 6*COM, 1*HDMI, 1*VGA, Mic-in/Line-out;
- Fan-less & Rich IO design, Panel mount, VESA, Front IP65 protection.

Specification

Hardware & System	BIOS	SPI AMI EEI BIOS
	CPU	Intel Cedar trail N2600, Dual-core 1.6Ghz
	Memory	SO-DIMM, DDR3, Max. up to 4GB
	Storage	1*mSATA
	Graphic	Intel HD GMA3650
	Network	2* Intel I211AT (Optional 3G/4G/Wi-Fi)
	Audio	On-board Realtek ACL 282 audio controller
	Expansion	1* Full size Mini-PCIe slot
	Watch dog	0~256 seconds programmable
	OS	Win XP, Win7, Win8, Win embedded, Linux
IO interface	COM	6*RS232 (Optional support 1* RS485)
	Ethernet	2* RJ45, 10/100/1000 Mbps
	Audio	Mic-in/Line-out
	USB	5x USB2.0
	Display	1x HDMI, 1x VGA
	Power	1x 2 pins, phenix terminal
LCD Display	Size/Type	15.0" TFT LCD
	Resolution	1024 * 768 (XGA)
	Brightness	350 nits
	Backlit & MTBF	LED backlit & 50 000hours
	Display area	304.128 * 228.096
	View angle	80/80/80/80
Touchscreen	Type	High temp. 5-wires Resistive touchscreen
	Response time	< 5ms
	Click life	250g / 35 million times
	Special treatment	PET film laminated, flat design
	Touch controller	EETI
Structure	Structure and surface	Magnesium-Aluminum alloy, sand blasting, anodized treatment
	Mount method	Panel mount (Optional support VESA 75/100)
	Cooling system	Large area finned heat sink
	Overall dimension	352.2 * 279.3 * 84.0 (mm)
	Cut-out dimension	341 * 268 (mm)
	Net weight	4.5 KG
	IP protection	Front Panel IP65
Power & Environmental	Operating temp.	-20 ~ +60°C
	Storage temp.	-30 ~ +80°C
	Relative Humidity	10 ~ 95% @ 10C (Non-condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	DC 12V
	Power consumption	Around 35W
	EMC	CE/FCC Class A

DIMENSIONAL DRAWING:TPC-PR150

Dimension

DIMENSIONS IN MILLIMETERS

TAICENN
 DATE:2019.06.13
 REV:A Unit:mm

Ordering info.

Part no.	Description
TPC-PR150N1	15.0", 1024 * 768, Intel Cedar trail N2600, Resistive touch, 2*GLAN, 5*USB, 6*COM, 1*HDMI, 1*VGA, Mic-in/Line-out, DC 12V
TDDR3-2/4GB1	Memory: SO-DIMM, DDR3,2GB/4GB Memory
TMSATA-32/64/128/256/512GB1	mSATA SSD: 32GB/64GB/128GB/256GB/512GB
TWM-WIFI1	Wi-Fi module, with Antenna
TWM-WIFIBT1	Wi-Fi with BT integrated module, with Antenna
TWM-4GA1	All network 4G/LTE module, With Antenna

Packing List

- 1x Standard Product
- 1x 60W PSU (Power Supply)
- 1x Power cable & Plug
- 8x Panel mount metal clips